


SECTION A-A

NOTE:

1. STEEL TO BE 2" CLEAR UNLESS OTHERWISE SHOWN.
2. PROVIDE ONE 3" CAST IRON WEEP HOLE IN EACH WINGWALL, AT CENTER, FOR PIPES OVER 36" DIA. PLACE WEEP HOLE AT TOP OF CLAY SUBBASE.
3. USE CLAY WHERE OTHER HEADWALLS CAN NOT BE USED.
4. HEADWALL TO BE PARALLEL TO CL OF ROADWAY.
5. CONCRETE TO BE CLASS "A" 3000 P.S.I. COMPREHENSIVE STRENGTH.

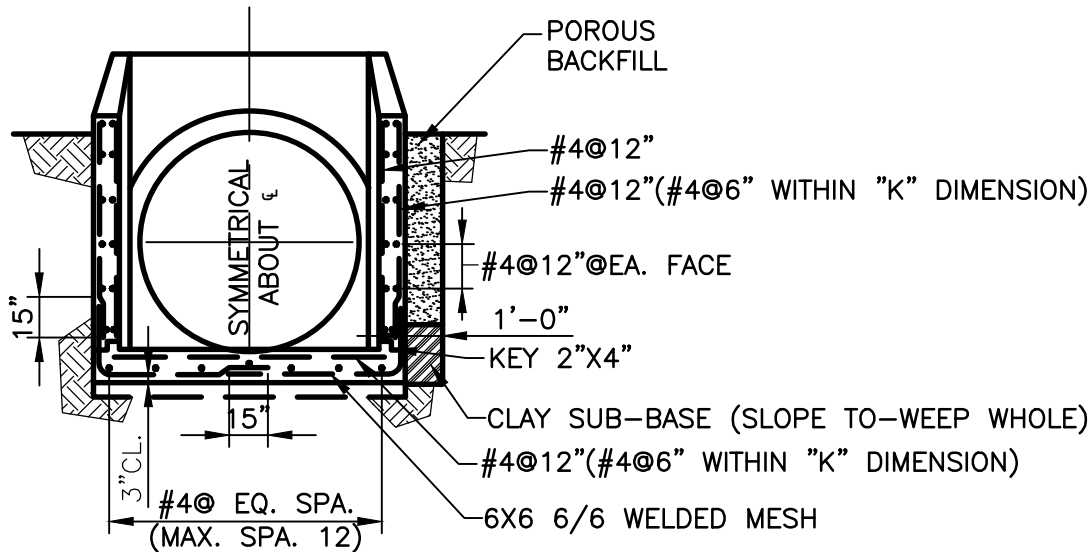

SECTION A-A

THIS DETAIL WAS TAKEN FROM THE CITY OF ATLANTA'S WEBSITE. IT MAY HAVE BEEN MODIFIED AND SHOULD BE REVIEWED THOROUGHLY.

City of Atlanta



STANDARD DETAILS

TYPE C HEADWALL
SHEET 2 OF 3

REV.

DATE: SEPT 2011

ORIG. DATE: JULY 1984

SCALE: N.T.S.

DETAIL NO. SW-G_HW004